


ZL-S2070/2071

2U/19-inch standard Industrial chassis,
supports up to ATX (9.6"x 12")
motherboards

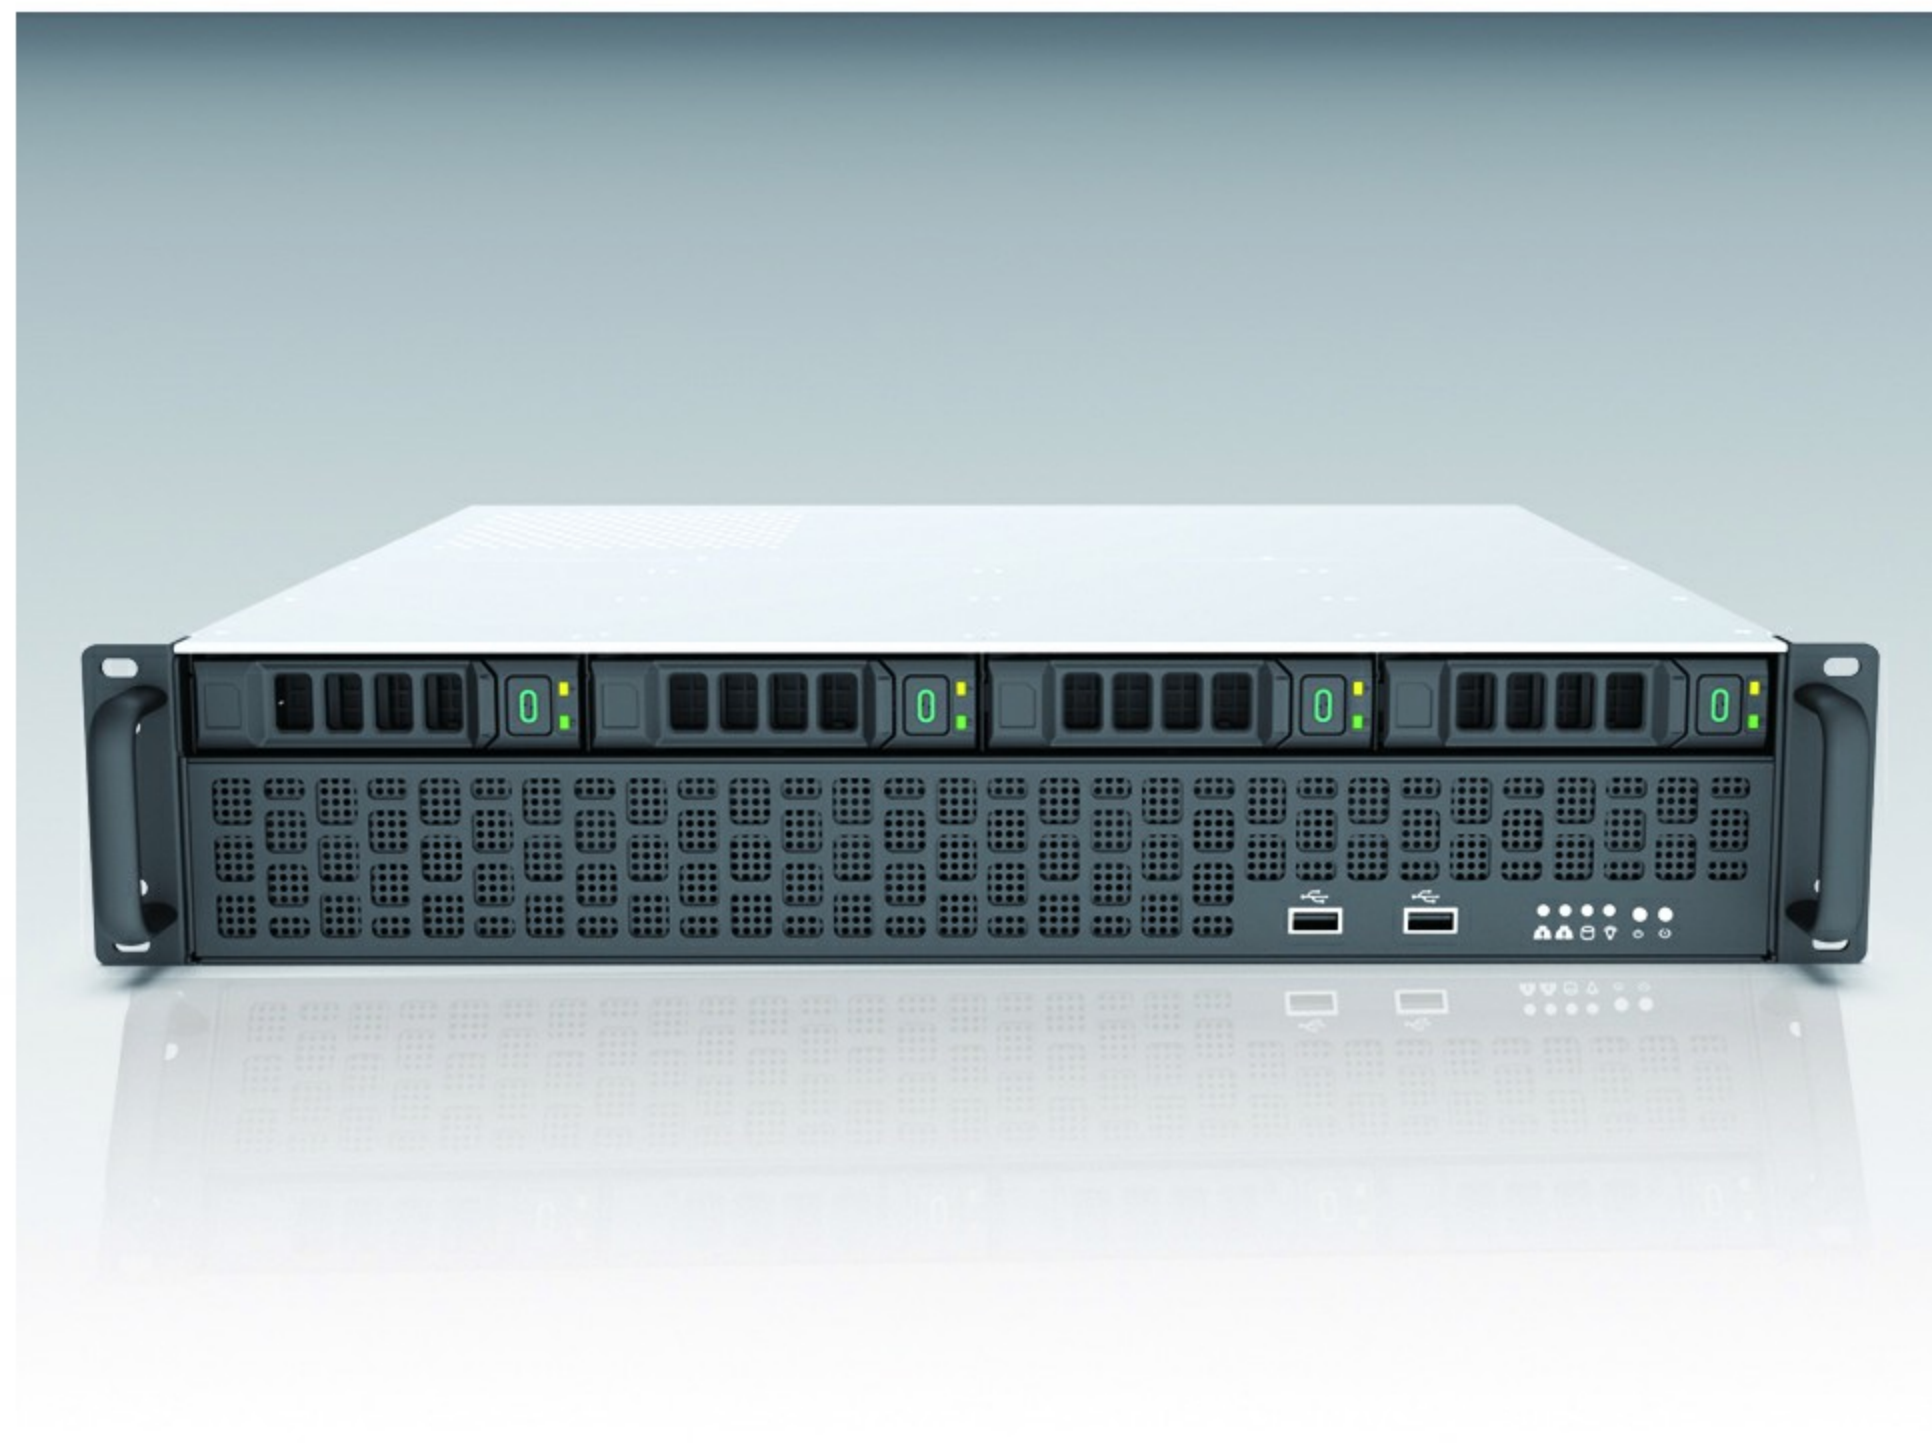

Features

- 主板最大支持ATX及以下规格
- 直连SAS/SATA背板，或者可选4.0 NVMe/SAS/SATA背板
- 支持ATX电源
- 智能温控，最多支持6 x 4020/4028风扇
- 5个半高的PCIe扩展卡位

技术参数

机箱形态	机架式
机箱高度	2U
适应主板	ATX/Micro-ATX及以下
背板	直连SAS/SATA背板，或者可选4.0 NVMe/SAS/SATA背板
磁盘位	支持SGPIO，兼容SAS3.0/SATA3.0硬盘，最多支持4块3.5"（或2.5"）热插拔硬盘位
硬盘防震	硬盘架采用EMI弹片设计，独有防震风扇设计，降低风扇与硬盘间共振，不影响硬盘I/O速度
系统风扇	支持智能温控，最多支持6个4020/4028风扇
扩展卡位	5个半高的PCIe扩展卡位
前板控制	2个USB 2.0，1个开关键，1个重启键，1个UID，1个硬盘指示灯，1个系统故障灯，1个网络指示灯
滑轨	选配
产品材质	进口SGCC（镀锌钢板）
机箱尺寸	370 x 438 x 88mm
机箱毛重	10KG
包装尺寸	486 x 553 x 218mm

Technical Parameter

Chassis style	rack type
Chassis height	2U
Supported Motherboards	ATX/Micro-ATX and below
backplane	Directly connected to SAS/SATA backplane, or optional 4.0 NVMe/SAS/SATA backplane
Disk slot	Supports SGPIO, compatible with SAS3.0/SATA3.0 hard drives, supports up to 4 3.5 "(or 2.5") hot swappable hard drive slots
Hard drive shockproof	The hard drive rack adopts EMI shrapnel design and a unique shock-absorbing fan design to reduce resonance between the fan and the hard drive, without affecting the I/O speed of the hard drive
System fan	Support intelligent temperature control, up to 6 4025 fans supported
Expansion slot	5 and a half high PCIe expansion card slots
Front panel control	2 USB 2.0, 1 power button, 1 restart button, 1 UID, 1 hard disk indicator light, 1 system fault light, 1 network indicator light
Sliding rail	Optional
Product Material	Imported SGCC (galvanized steel sheet)
Case size	370 x 438 x 88mm
Case gross weight	10KG
Package dimensions	486 x 553 x 218mm

